




PROTOCOL™

PRODUCT MANUAL TOOL MOUNT BRACKET ACCESSORY

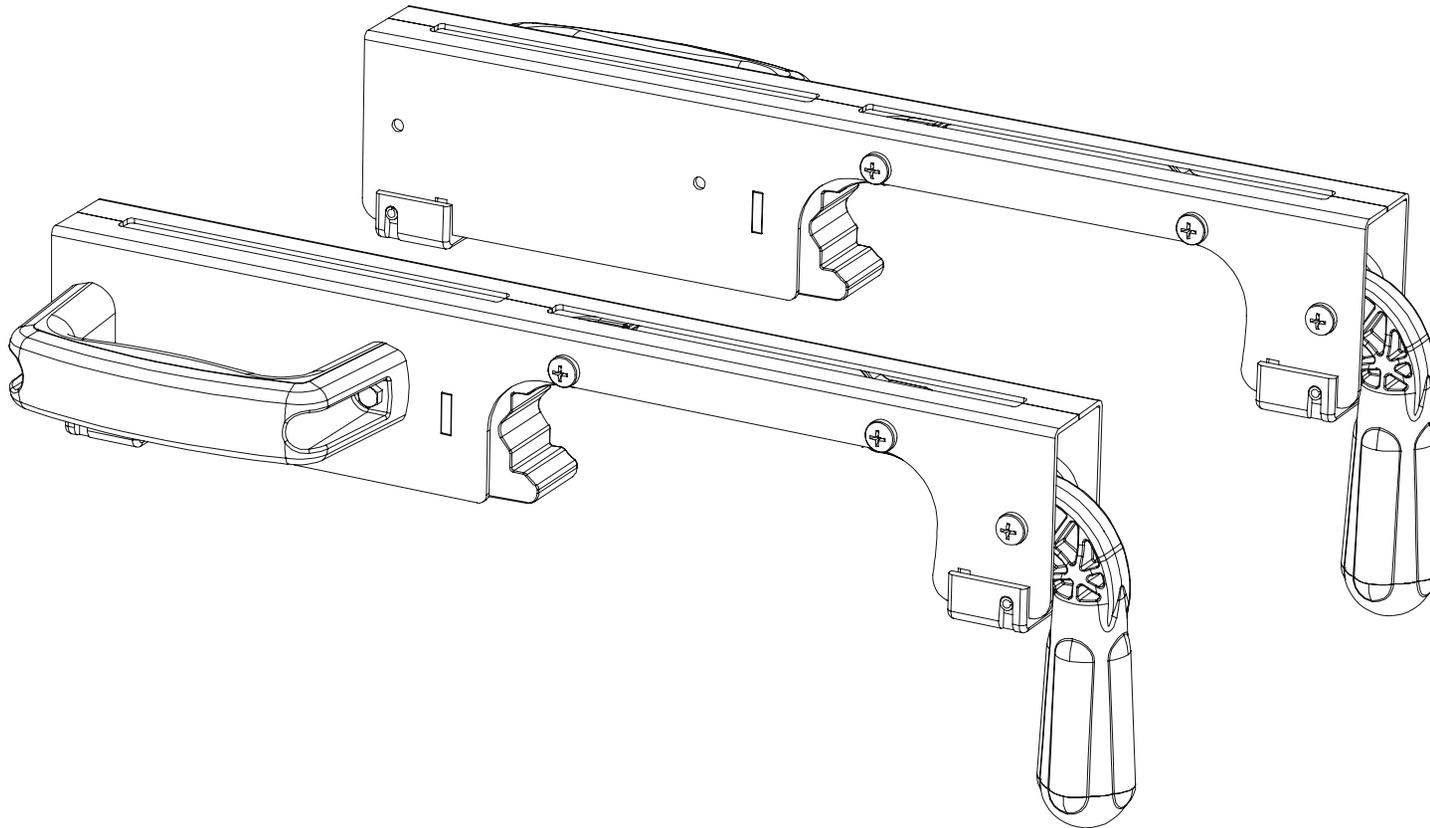

CAUTION: To Reduce the Risk of Injury, User Must Read and Understand Operator’s Manual. Save These Instructions For Future Reference.

Warning: Be sure to read and understand all safety instructions in this manual, including all safety alert symbols such as “DANGER”, “WARNING”, and “CAUTION”, before using this power tool. Failure to follow all instructions listed below may result in electrical shock, fire and/or serious personal injury.

GENERAL SAFETY INSTRUCTIONS FOR POWER TOOLS

Using power tools of any kind can be dangerous if safe operating procedures are not followed. Recognizing the hazards of each tool and using them with the respect and caution considerably limit the possibility of personal injury. However, if safety precautions are ignored, personal injury will likely result. Always use common sense – your personal safety is your responsibility.

1. Know your power tool. Read and understand the Operator’s Manual and observe the warnings and instruction labels affixed to the tool.
2. Wear safety goggles.
3. Wear safety apparel.
4. Never stand or sit on anything attached to these brackets.
5. Replace damaged components immediately.
6. Make sure your work platform is sufficiently sturdy to do the specific job at hand.
7. Think Safety, Safety is a combination of operator awareness, common sense and alertness at all times.

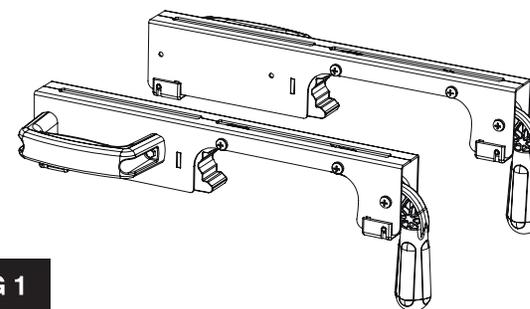


FIG 1

PARTS LIST

PART #	DESCRIPTION	QTY				
1	Tool Mount Bracket Accessory	1 set	①	②	③	④
2	Offset Mounting Brackets	2 pcs	⑤	⑥	⑦	
3	Nut M8	6 pcs				
4	Spring Washer #8	6 pcs				
5	Washer #8	6 pcs				
6	Carriage Bolt M8*50	4 pcs				
7	Carriage Bolt M8*20	2 pcs				

OVERVIEW

You have just purchased a set of Tool Mount Bracket Accessory. This product has been specifically designed to assist you in the use of your 10" - 20" miter saw, as well as increasing efficiency with other bench top tools such as table saws, band saws, scroll saws, planers, etc.

ASSEMBLY INSTRUCTIONS & ATTACHING YOUR MITER SAW OR OTHER BENCH TOP POWER TOOLS

Various bench top tools can be attached to the Tool Mount Bracket Accessory. Always position the tool to achieve maximum balance and stability. All four corners of the saw must be bolted to the tool mounts before use. Make sure the bolts do not extend above the table of the miter saw.

1. Unplug the tool and lock down any moving parts.
2. Place a tool mount underneath the tool, aligning the mounting holes on the tool base with the slot in top of the tool mount.
3. Feed a carriage bolt up through the tool mount and the mounting hole in the power tool.
4. Secure in place using a flat washer, lock washer and nut.
5. Repeat through the other end of the tool mount.
6. Place the second tool mount underneath the other side of the tool, aligning the mounting holes and repeat steps 1 thru 5 on the miter saw base with the opening in the tool mount.
7. After making sure both tool mounts are parallel to each other, finger tighten all four nuts to hold in position.

NOTE: If the tool has holes that do not line up with the slots in the tool mounts, then use the offset mounting brackets, as seen in Figure 3.

OFFSET MOUNTING

Offset Mounting Bracket for Miter Saws and/or Power Tools with an irregular mounting hole pattern.

INSTRUCTIONS:

Secure offset mounting brackets as shown.

Brackets can be used on the front or rear of the Tool Mount Bracket Accessory.

FIG 2


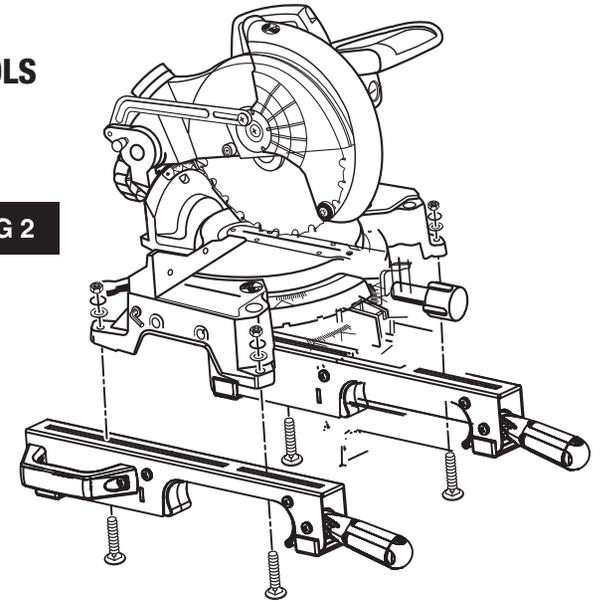


FIG 3

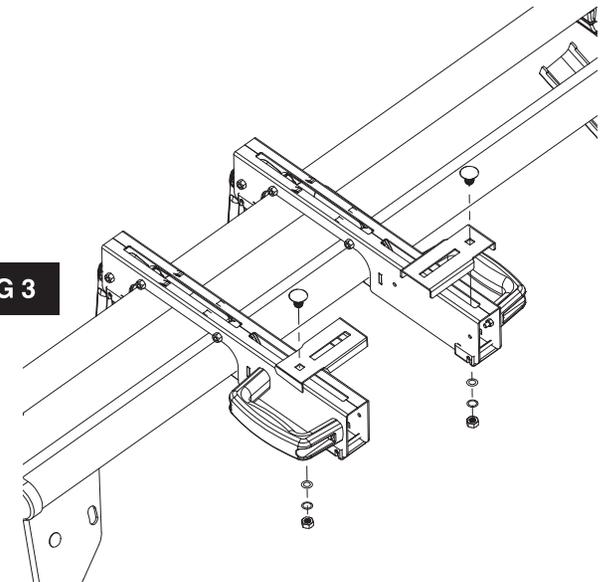

MOUNTING THE TOOL ASSEMBLY TO THE TOOL STAND

Use the handles located at the rear of the tool mounts to aid in installing or removing saw and tool mount assembly.

1. Lift the tool and tool mount assembly, allowing the assembly to tilt slightly toward your body.
2. While still tilted toward you, hook the front edge of the tool mount assembly onto the front rail of the stand.
3. Lower the tool assembly to allow the rear edge of the tool mount to seat fully over the rear rail.
4. Lock the tool mounts in position by lowering the locking levers.

NOTE: Continue to hold the tool mount assembly with one hand until both levers are securely locked.

1. Check position and adjust, if necessary, to make sure the weight of the tool is evenly balanced over the rails.
2. Ensure the tool is fully seated and locked in position, then securely tighten the four nuts holding the tool to the tool mounts.

TO REMOVE TOOL ASSEMBLY FROM STAND

1. Raise the locking levers to unlock the tool and tool mounts.
2. Lift away from the rear rail of the stand to disengage.
3. With the assembly tilted slightly toward you, lift the assembly to disengage from the front rail of the stand.

MAINTENANCE

TOOL MOUNT ADJUSTMENT SCREW

Most plastic tool mounts are designed to fit snugly over the stand rails. With the locking levers in the lowered (locked) position, you should not be able to remove the tool and/or tool mounts assembly from the rails. If the saw and tool mount can be removed from the rails when the levers are locked, the tool mount adjustments screw need to be tightened. If the saw and tool mount assembly will not fit over both rails, the bracket adjustment screws needs to be loosened.

FIG 4


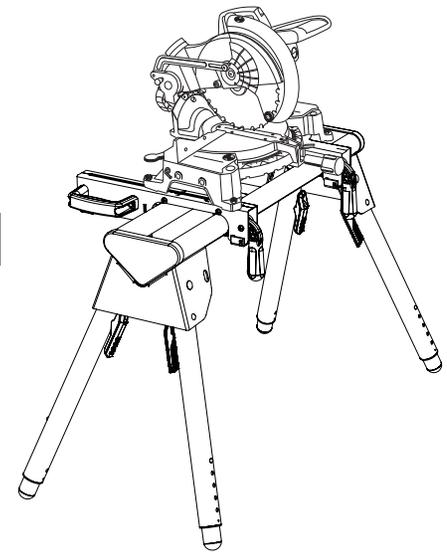


FIG 5

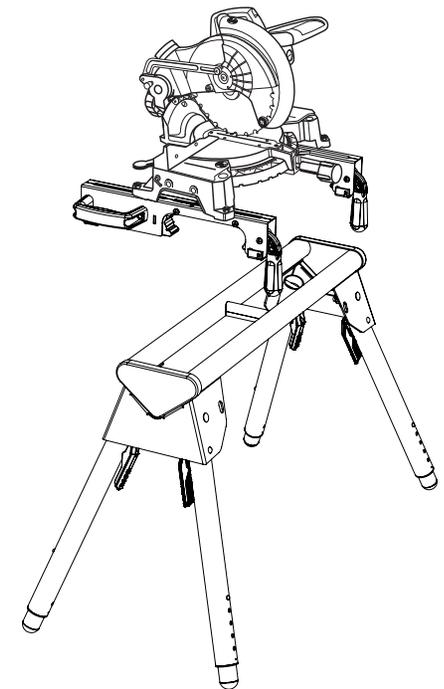


NOTE: The saw should be removed from the tool mounts before attempting to tighten or loosen the tool mount adjustment screws.

TO ADJUST:

1. Use a wrench to slightly loosen the nut.
2. Turn the screw with a Phillips screwdriver. Rotate clockwise, if the tool mount assembly needs to be tightened. Rotate counterclockwise if the assembly needs to be loosened.
3. Install the tool mount on the miter stand rails and lower the locking lever to check the adjustment.
4. When the correct position is achieved, wrench tighten the nut to secure.
5. Repeat with the second tool mount.

GENERAL MAINTENANCE

Avoid using solvents when cleaning. Most items are susceptible to damage from various types of corrdirt, dust, oil, grease, etc.

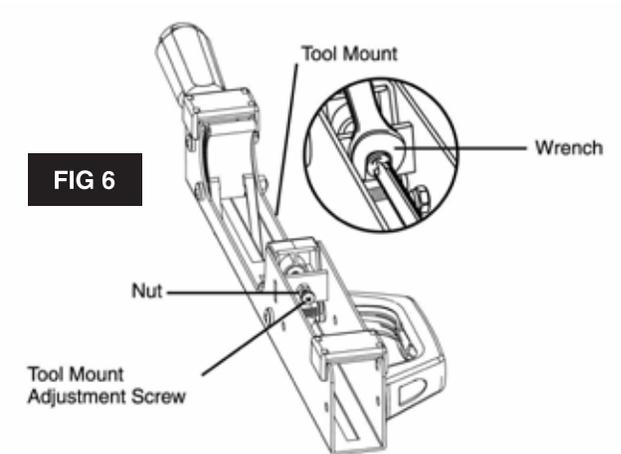

LIFETIME | **LIMITED WARRANTY**

PROTOCOL™ Tool Mount Bracket Accessory is backed by a Limited Lifetime Warranty. This warranty covers manufacturer defects and workmanship. The warranty excludes misuse or abuse and normal wear and tear. Exclusion is not allowed in some states and may not apply. This warranty gives you specific legal rights, and you may have other rights, which vary from state to state.

JS PRODUCTS, INC. | 6445 MONTESSOURI STREET | LAS VEGAS, NV 89113
800.255.7011 | FAX: 775.898.8773 | FOR MORE PRODUCTS AND ACCESSORIES GO TO WWW.PROTOCOLEQUIPMENT.COM